


# PS-8X Specification

Parameter/Mode	PS-8X
Natural Frequency(Hz)	8±5%
Coil Resistance( $\Omega$ )	395±5%
Sensitivity(V/m/s)	28.0±5%
Sensitivity With Shunt Resistor(V/m/s)	23.0±5%(1800 $\Omega$ )
Damping	0.38±5%
Damping With Shunt Resistor	0.71±5% (1800 $\Omega$ )
Distortion(%)	≤0.2
Max.Motion (mm)	1.5
Moving Mass(g)	11
Dimensions(d×h)mm	25.4×34
Temperature Range( $^{\circ}$ C)	-40~+70
Warranty Period(year)	3
Case Type	VW Underwater Case; VM Marsh Case; VS Well Case; VHL Land 3 Componet Case; VLW Land and Underwater Case;



<http://www.sunfull.com>

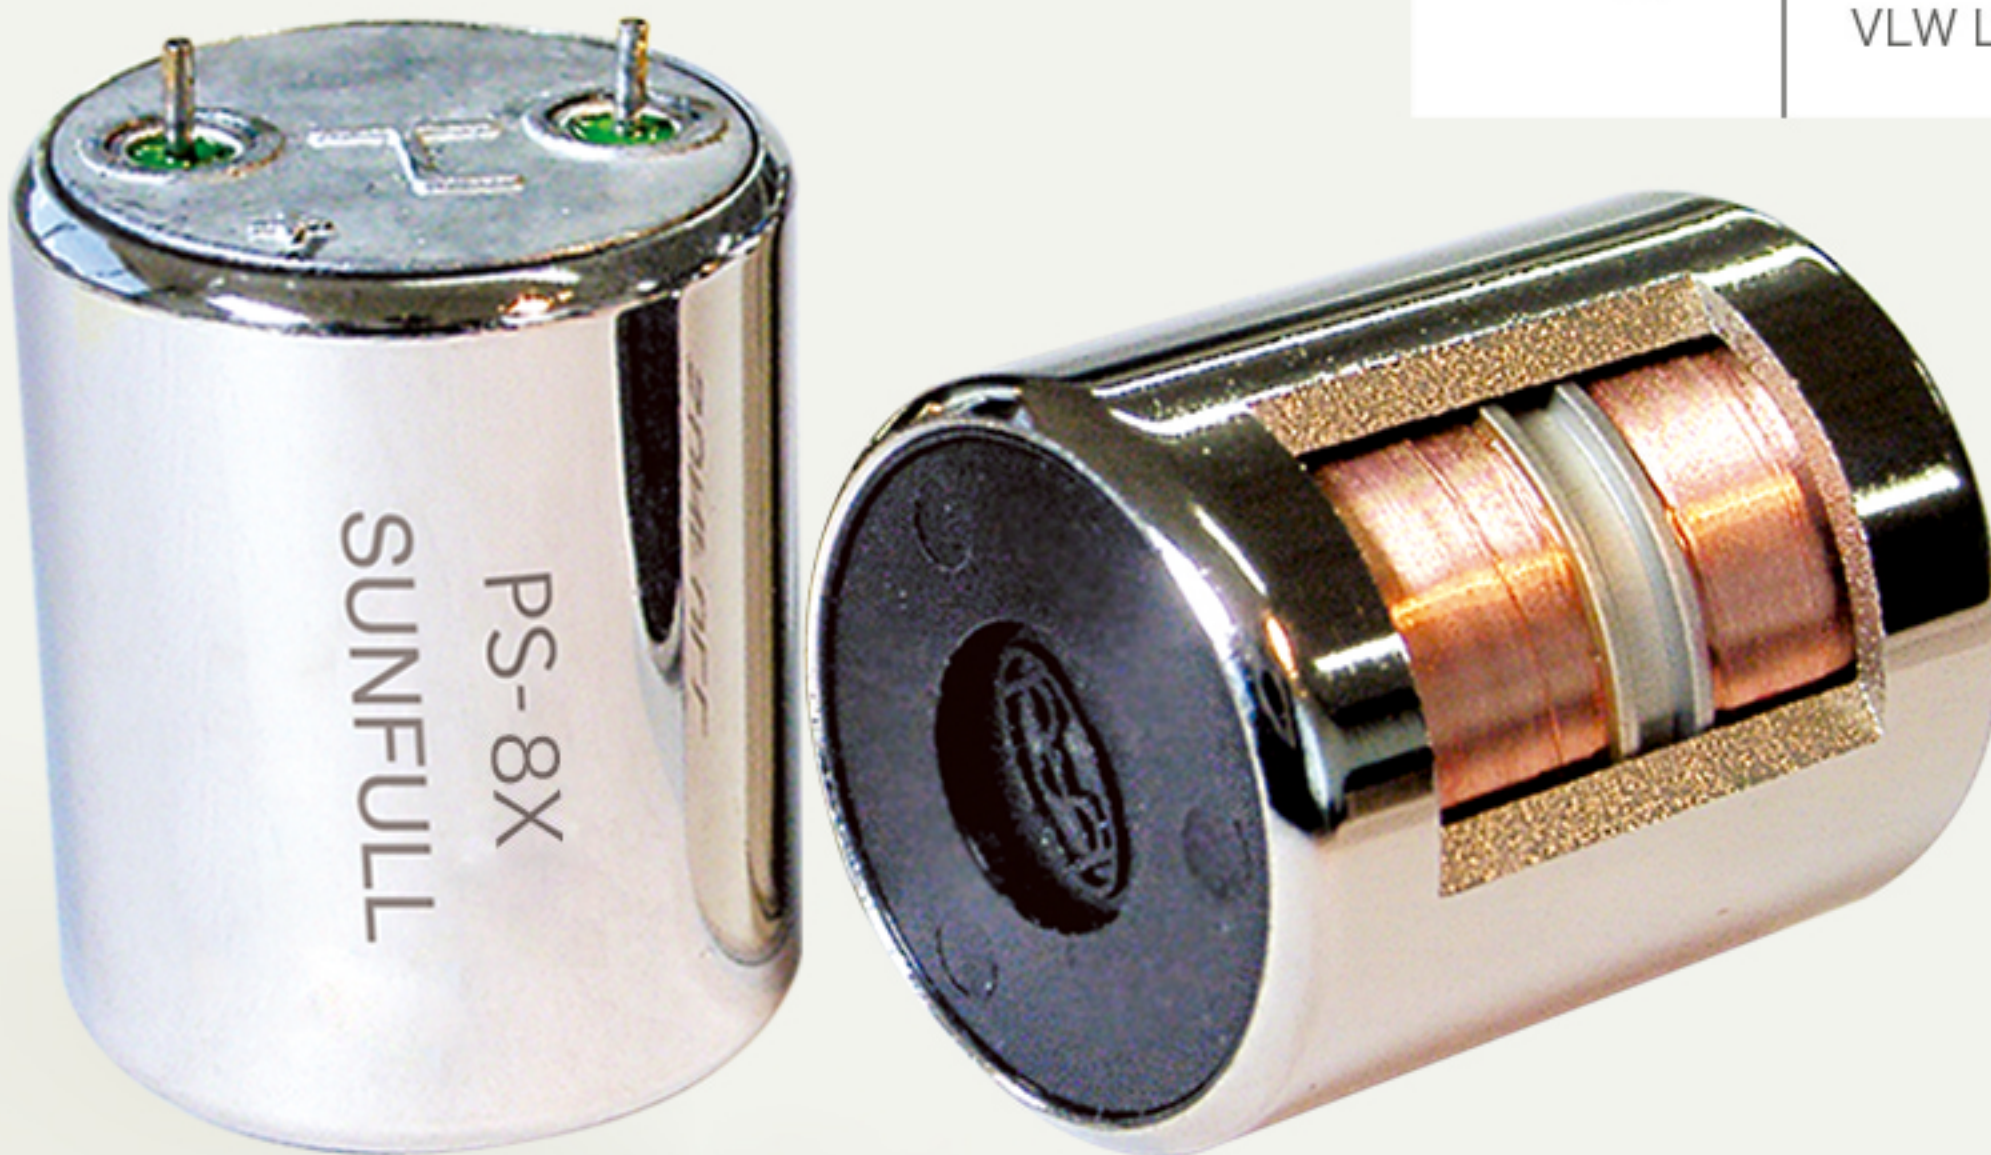