


PS-14X Specification

Parameter/Mode	PS-14X
Natural Frequency(Hz)	14±5%
Coil Resistance(Ω)	395±5%
Sensitivity(V/m/s)	28.0±5%
Sensitivity With Shunt Resistor(V/m/s)	20.1±5%(1000 Ω)
Damping	0.22±5%
Damping With Shunt Resistor	0.510±5% (1000 Ω)
Distortion(%)	≤0.2
Max.Motion (mm)	1.5
Moving Mass(g)	11
Dimensions(d×h)mm	25.4×34
Temperature Range($^{\circ}$ C)	-40~+70
Warranty Period(year)	3
Case Type	VW Underwater Case; VM Marsh Case; VS Well Case; VHL Land 3 Componet Case; VLW Land and Underwater Case;



<http://www.sunfull.com>

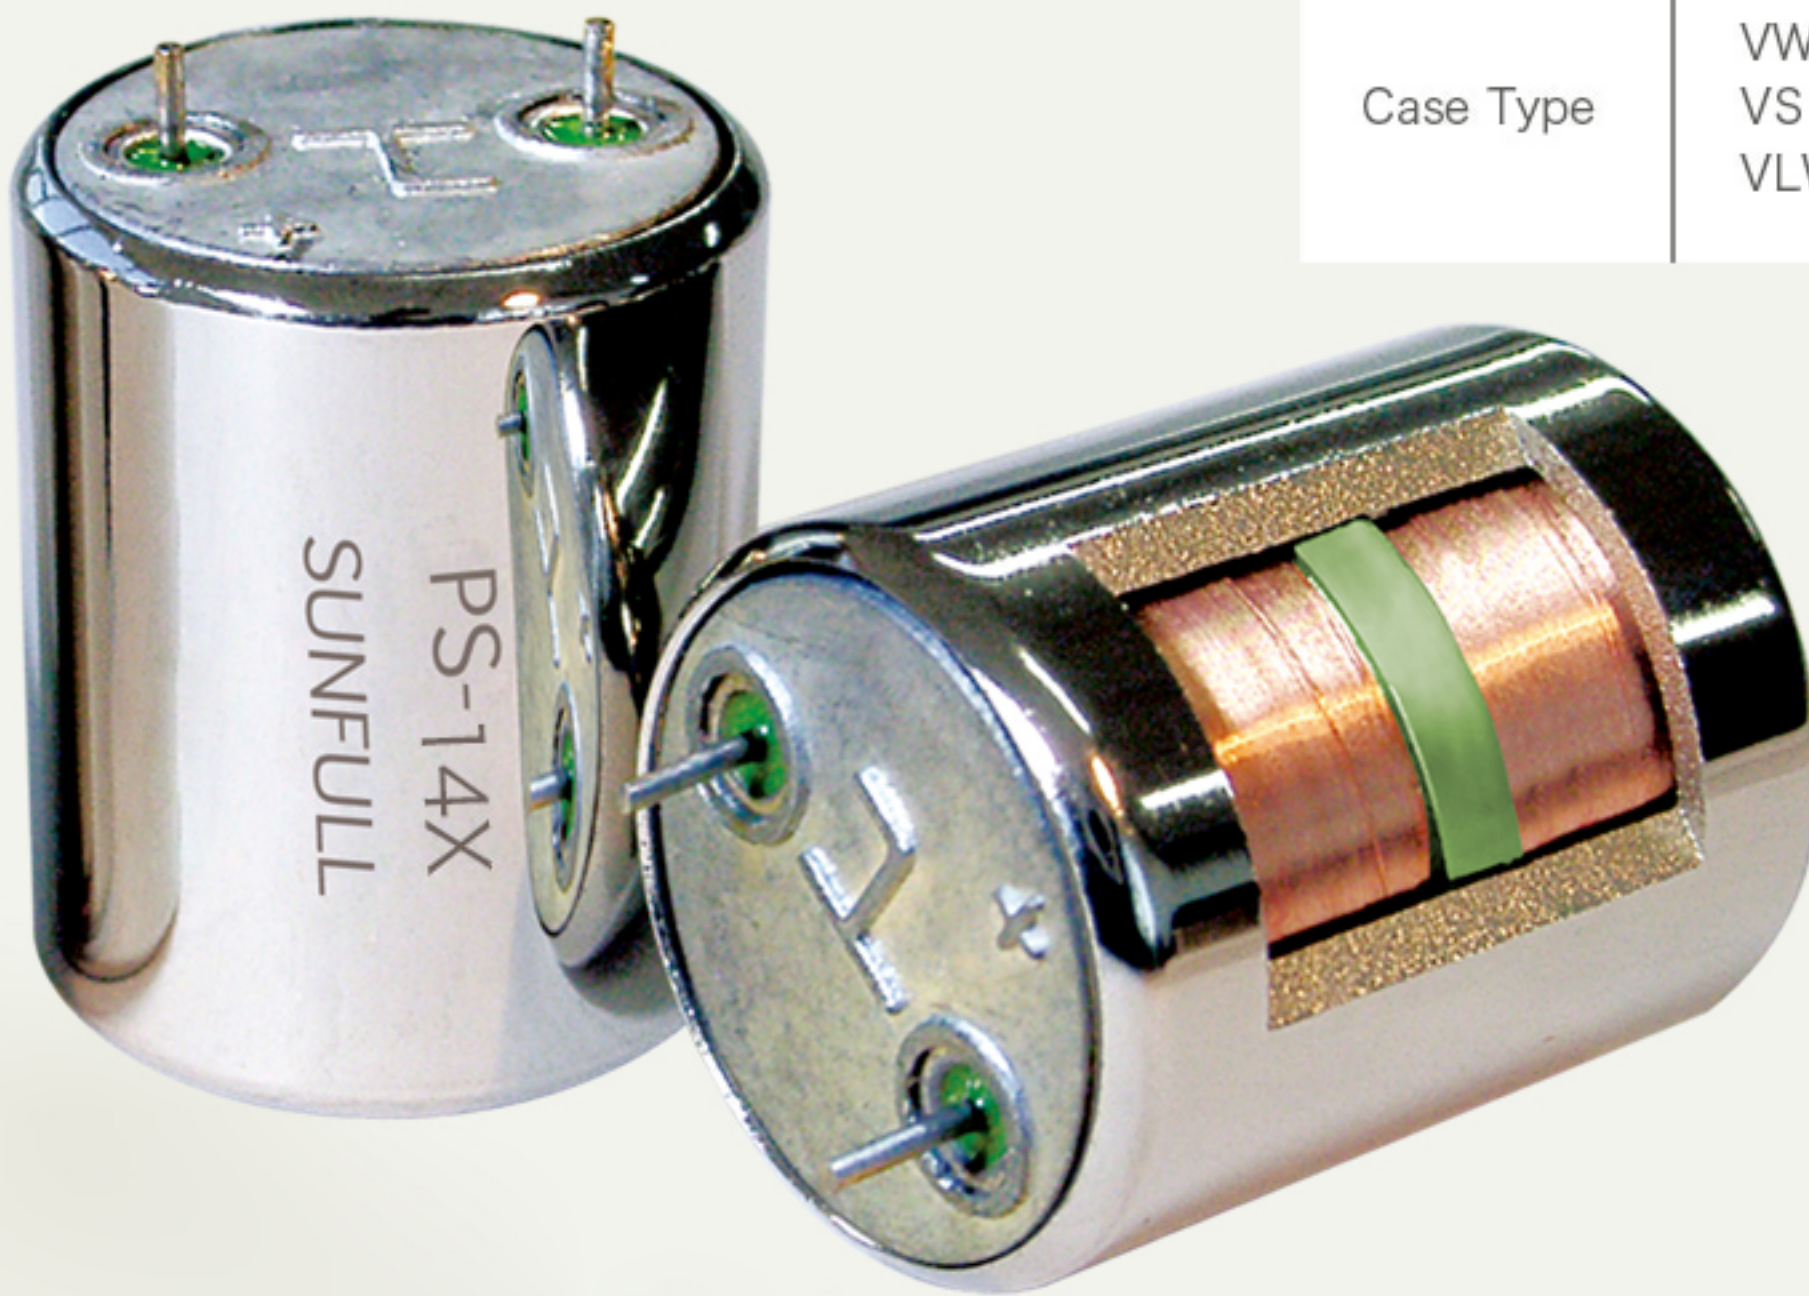