


# PS-40X Specification

Parameter/Mode	PS-40X
Natural Frequency(Hz)	40±5%
Coil Resistance(Ω)	575±5%
Sensitivity(V/m/s)	42.0±5%
Sensitivity With Shunt Resistor(V/m/s)	30.4±5%(1500Ω)
Damping	0.37±5%
Damping With Shunt Resistor	0.576±5% (1500Ω)
Distortion(%)	≤0.2
Max.Motion (mm)	1.5
Moving Mass(g)	8.2
Dimensions(d×h)mm	27×34
Temperature Range(°C)	-40~+70
Warranty Period(year)	3
Case Type	VW Underwater Case; VM Marsh Case; VS Well Case; VHL Land 3 Componet Case; VLW Land and Underwater Case;



<http://www.sunfull.com>

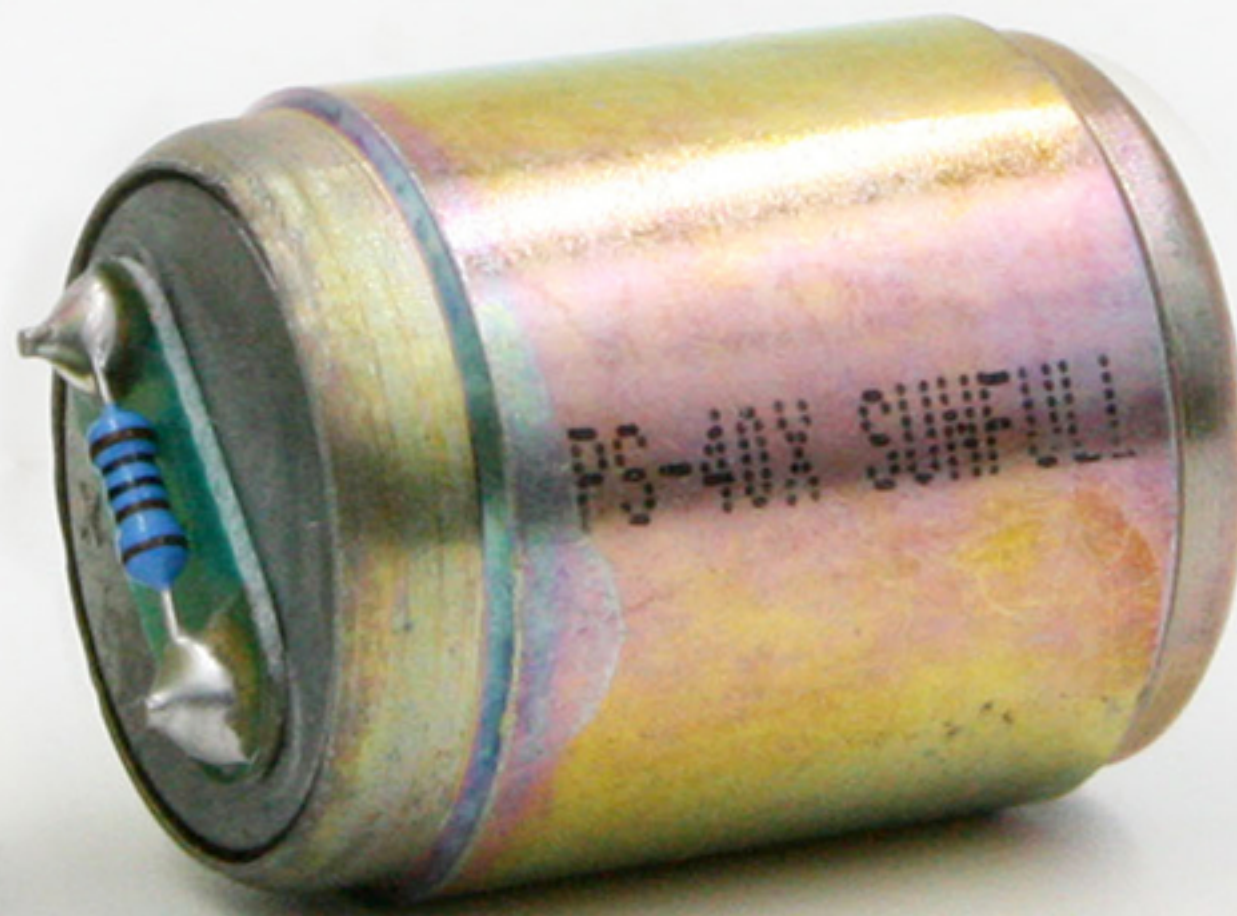